





Installation document for alcohol interlocks

Connection schematics:

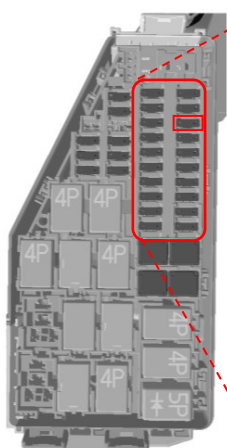

1	13
2	14
3	15
4	16
5	17
6	18
7	19
8	20
9	21
10	22
11	23
12	24

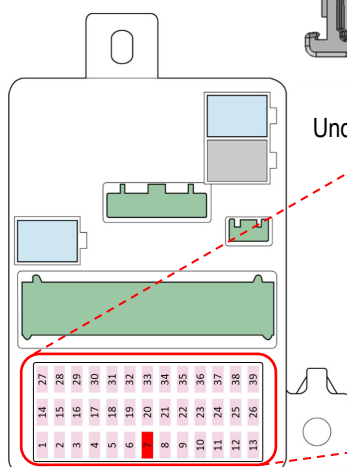

Under dashboard fuse box

1	14	27
2	15	28
3	16	29
4	17	30
5	18	31
6	19	32
7	20	33
8	21	34
9	22	35
10	23	36
11	24	37
12	25	38
13	26	39

	Function	Position of connection
①	Engine operation (Start signal) (STRQ) Prohibits the vehicle from starting if circuit is open.	Pin 1 of 4 pin connector (Male) Pin 1 of 4 pin connector (Female)
②	Ignition power (IG1) (Vehicle ready) (Fuse 7 under dashboard fuse box - limit 10A)	Pin 2 of 4 pin connector (Male)
③	Ground	Pin 3 of 4 pin connector (Male)
④	Battery supply (+B), non blocking (Fuse 15 under hood fuse box - limit 10A)	Pin 4 of 4 pin connector (Male)

Safety risks at installation and items to be considered

When installing on vehicles equipped with airbags, please make sure to never install any devices or wiring in a place that could interfere with the airbag cover parts or airbag operation.
In the event of an emergency, it may have a serious impact on passengers.

When installing the alcohol interlock device on the dashboard, install it so that it does not interfere with the drivers view or controls of the vehicle.





HONDA

e:Ny1 EV 2023- (RS1)


Assembly instructions:

(RHD)


Connection point location:

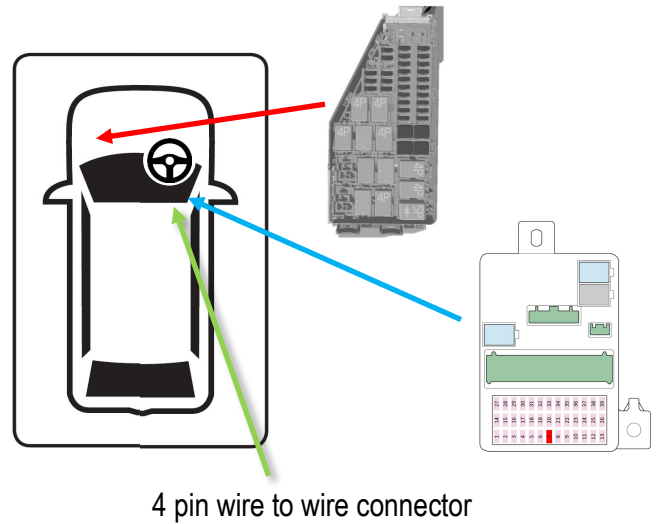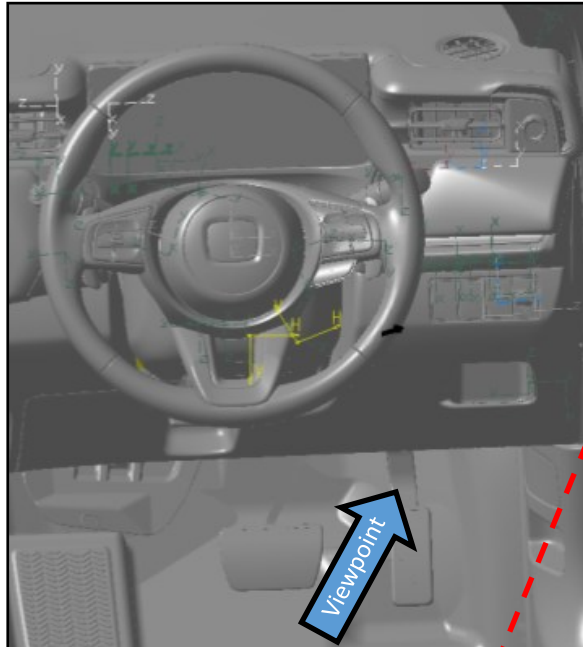

4 pin wire to wire connector

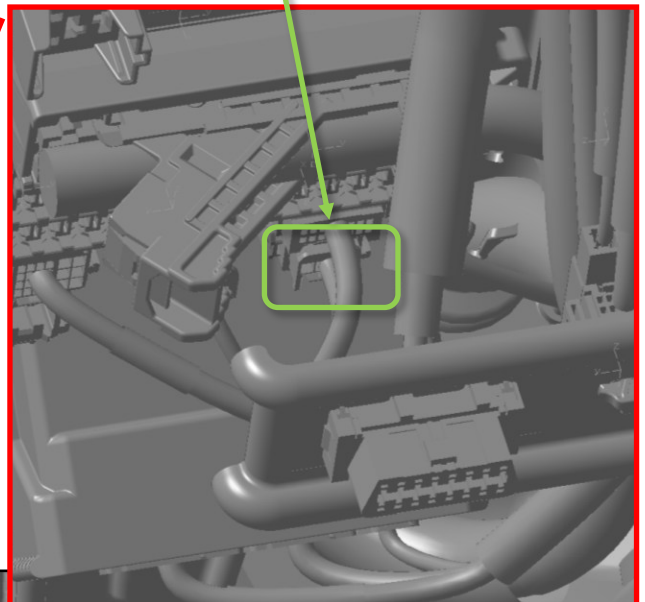

Viewpoint

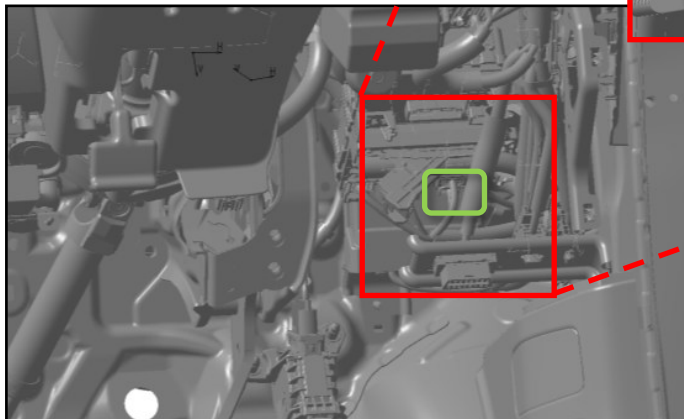




HONDA

e:Ny1 EV 2023- (RS1)




Assembly instructions:

(LHD)


Connection point location:

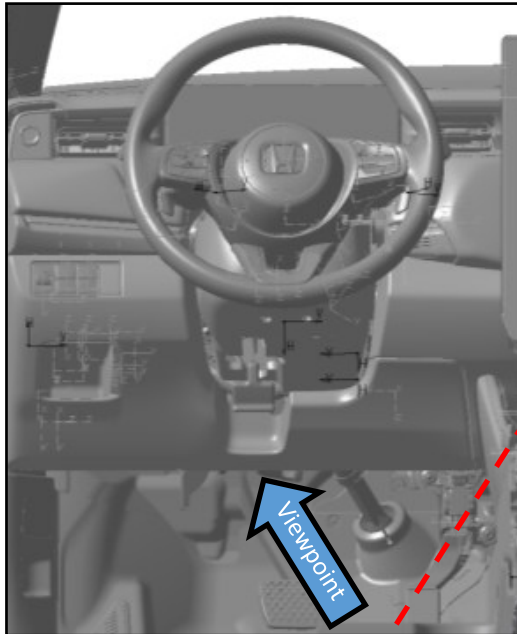

Viewpoint

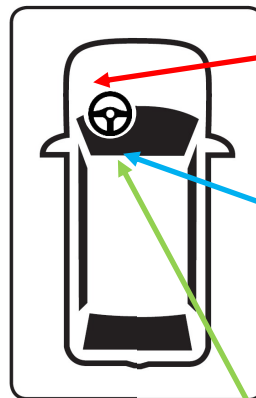

4 pin wire to wire connector

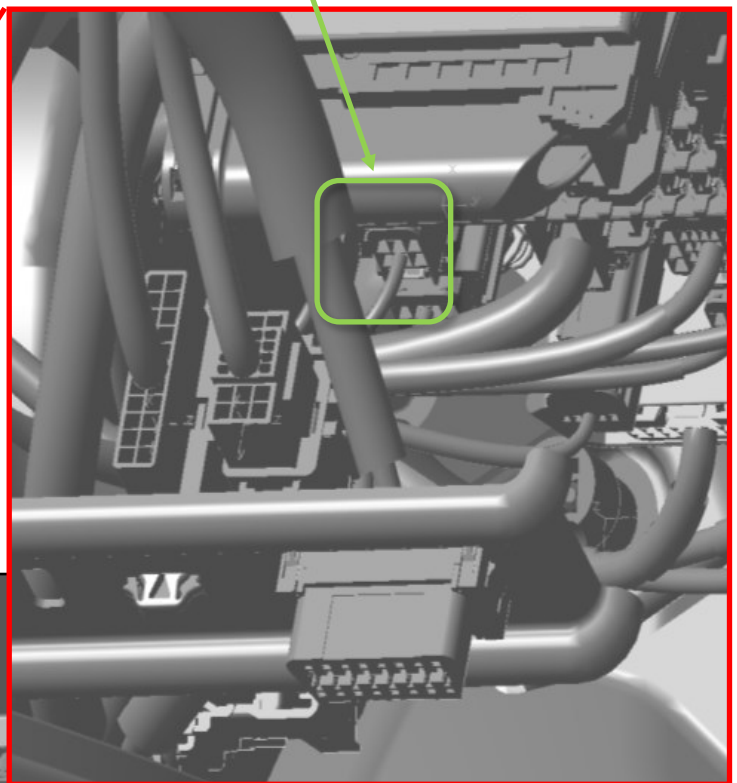




Connection point:

4 pin wire to wire connector.

Disconnect the connector and make the connections between the male and female connectors with compatible connectors and terminals made by YAZAKI.

Connector type: YAZAKI

7186-8849 (male)




Male Terminals*


7114-7386-02 (S)

7114-7387-02 (M)

7114-7388-02 (L)



7187-8854 (female)




Female Terminals*

7116-7389-02 (S)

7116-7390-02 (M)



7116-7391-02 (L)



*Different sizes by wire gauge

Panel removal:

RHD shown, LHD is a mirror image.

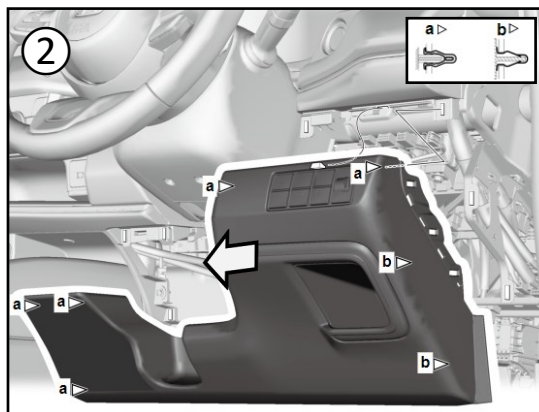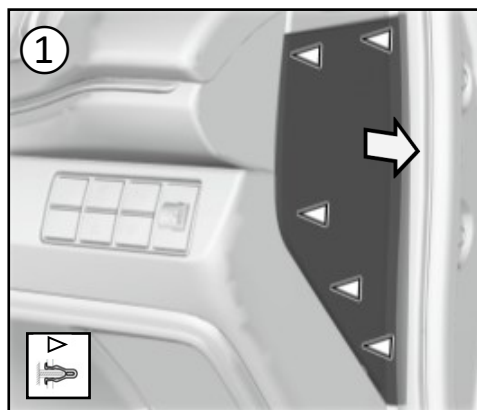

Modification of vehicle operation:

None applicable.

Mounting position of alcohol interlock handset and alcohol interlock control unit:

Recommended installation position:

Install in a position that does not interfere with driving operations or visibility.

Positions where it should not be installed:

Do not install in the airbag deployment area.